


| NO | DESCRIPTION | MAT'L | Q'TY | WT(kg) | REMARKS |
|----|-------------|-------|------|--------|---------|
| | | | | | |

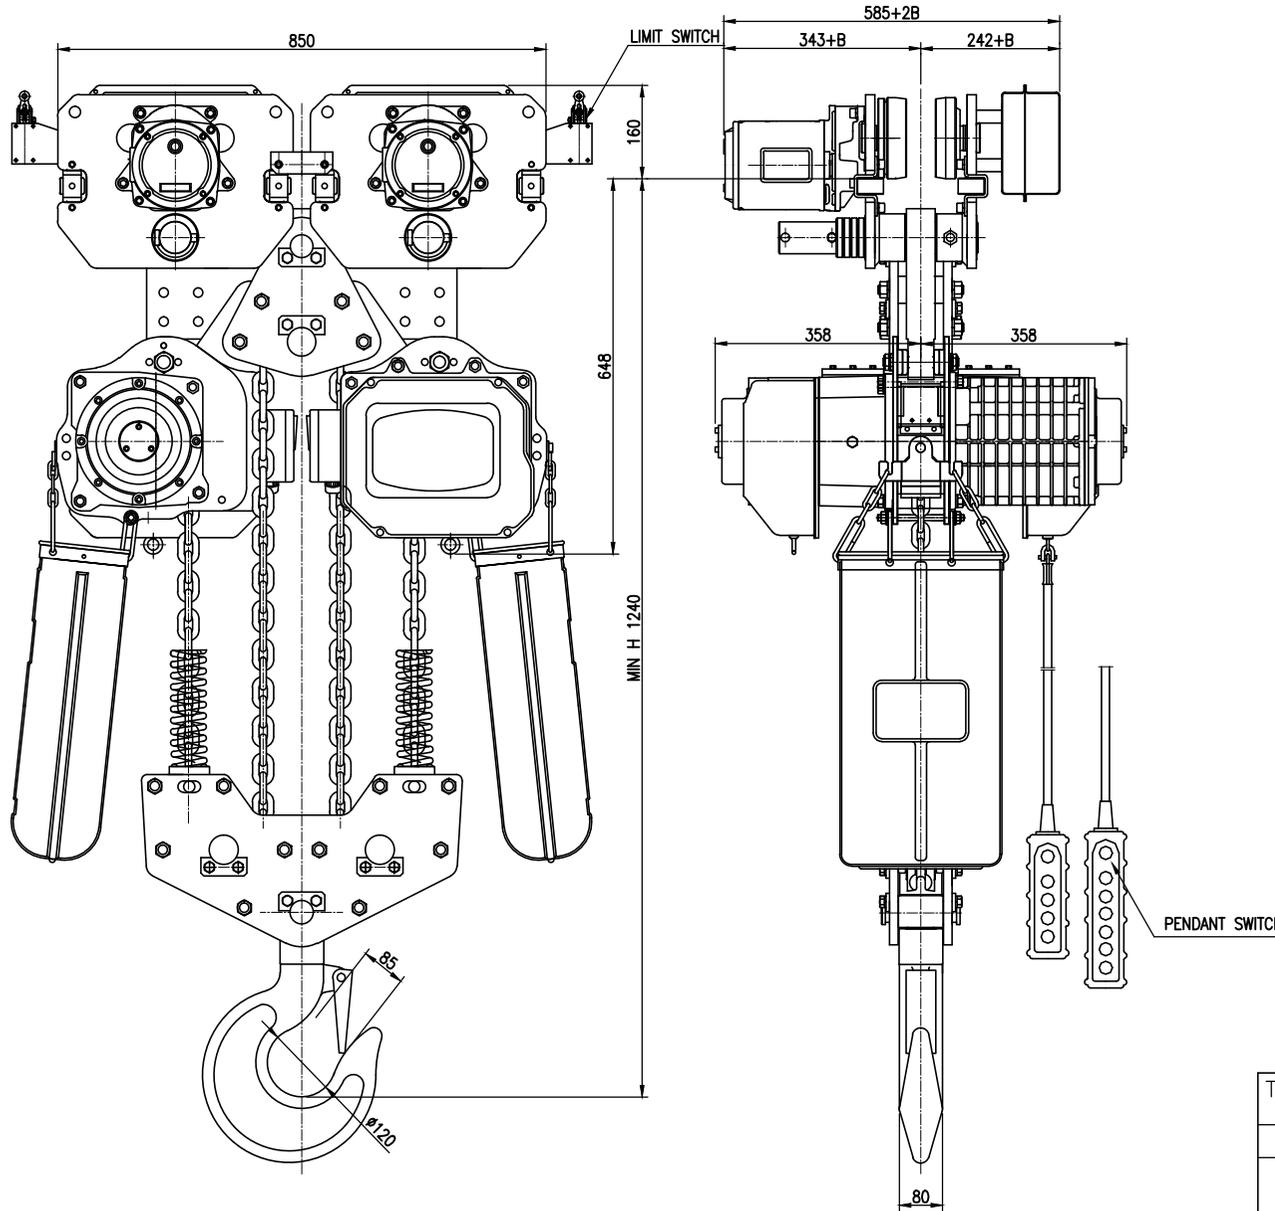

| SPECIFICATION | | | |
|------------------|------------------------------|------|------------|
| HOISTING LOAD | 10 | TON | |
| TESTING LOAD | 12.5 | TON | |
| LIFTING HEIGHT | 5 | M | |
| HOISTING | SPEED | 3.25 | M/MIN |
| | MOTOR | 3.5 | KW x 2 SET |
| TRAVERSING | SPEED | 14 | M/MIN |
| | MOTOR | 0.75 | KW x 2 SET |
| POWER SUPPLY | AC 220,380,440. x 3φ x 60 Hz | | |
| OPERATING METHOD | P.B type ON . FL | | |
| WEIGHT | 657 KG | | |

- * β 는 BEAM 변동값임
- * ROLLER DIA : ø140
- * LIMIT SWITCH : OPTION
- * 본 도면은 1-BEAM 125MM 기준임.

| TITLE DSM-10W CHAIN HOIST | | | | PROJECTION | |
|---------------------------|-----------|------------|------------|------------|------|
| WORK NO | WORK NAME | | | | |
| | | | | SCALE | Q'TY |
| | | | | 1/1 | 1 |
| DRAWN | CHECKED | REVIEWED | APPROVED | DRAWING NO | |
| H.J | | LEE | Y.K | DSM10W001 | |
| 2020.09.14 | | 2020.09.14 | 2020.09.14 | | |

| 도면에 지시되지 않은 일반공차 | | | | | | |
|------------------|----|------|------|--------|---------|----------|
| 가공별 | 치수 | 3-6 | 6-30 | 30-120 | 120-315 | 315-1000 |
| 선 | 삭 | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.8 |
| 구멍간 | 거리 | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.8 |

| REV.NO | DATE | REVISION DESCRIPTION | DRAWN | CHECKED | APPROVED |
|--------|------|----------------------|-------|---------|----------|
| | | | | | |

DAESAN InoTEC INC